


FEATURES:

- SPECIALLY DESIGNED WATER TIGHT FRAME & COVER ASSEMBLY CAST OF TOUGH DURABLE DUCTILE IRON. DETERS SURFACE WATERS WITH THE USE OF BUNA-N O-RINGS.
- 14 GA. STAINLESS STEEL 5 GALLON PRIMARY SPILL CONTAINER
- 14 GA. GALVANIZED STEEL SECONDARY STEEL SPILL CONTAINER
- CHANNEL-STYLE CONCRETE ANCHORS
- $1\frac{1}{2}$ " OBSERVATION PORT
- VICTUAL DOUBLE-SEALING GASKET AND FLANGE ASSEMBLY

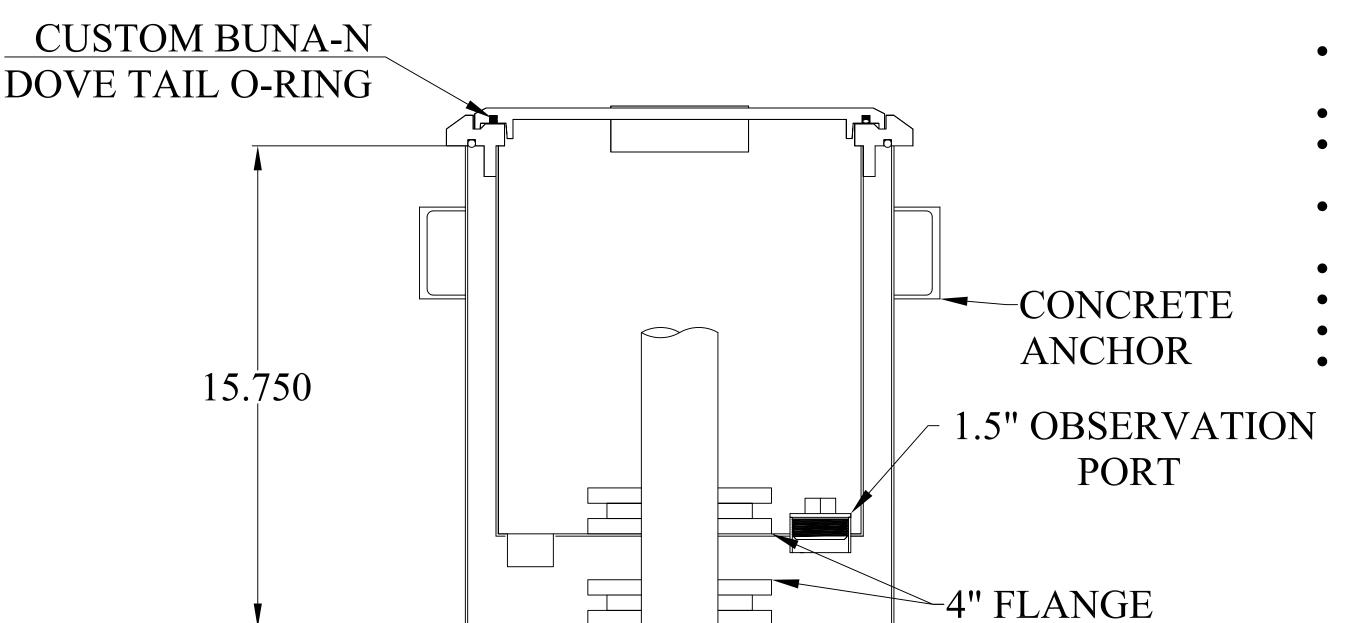

ADDITIONAL FEATURES

- SLIDE OVER FILL PIPES FOR QUICK AND EASY INSTALLATIONS.
- NO DEEP EXCAVATIONS.
- NO CUTTING OR THREADING TO FILL PIPES.
- DOES NOT INTERFERE WITH TANK INTEGRITY TESTS.
- RETROFITS ECONOMICALLY.
- NON-CORROSIVE CONSTRUCTION.
- LONG TERM, LITTLE MAINTENANCE.
- CAN BE INSTALLED ON REMOTE FILLS.

OPTIONAL FEATURES

- STD. 4" PIPE, OPTIONAL 2" AND 3" REQUEST UPON ORDERING.
- CHEMICAL RESISTANT SEALS AND PUMPS AVAILABLE.
- LARGER CONTAINMENT CAPACITIES AVAILABLE.

DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIED

DIMENSIONS ARE IN INCHES.


TOLERANCES ON ANGLES: ± 1°

FRACTIONAL: ± 1/16

2-PLACE DECIMALS: ± 0.062

3-PLACE DECIMAL: ± 0.032

THIRD ANGLE PROJECTION



FAIRFIELD INDUSTRIES, INC

4483 CHOPPEE ROAD, GEORGETOWN SC 29440 PHONE: 843-461-3894 FAX: 843-461-3907

DESCRIPTION

SCM-5DG CUT SHEET

This document is proprietary and confidential. No part of this document may be disclosed in any manner to a third party without the prior written consent of Fairfield Industries

-14.000