



RECESSED LIFTING HANDLE

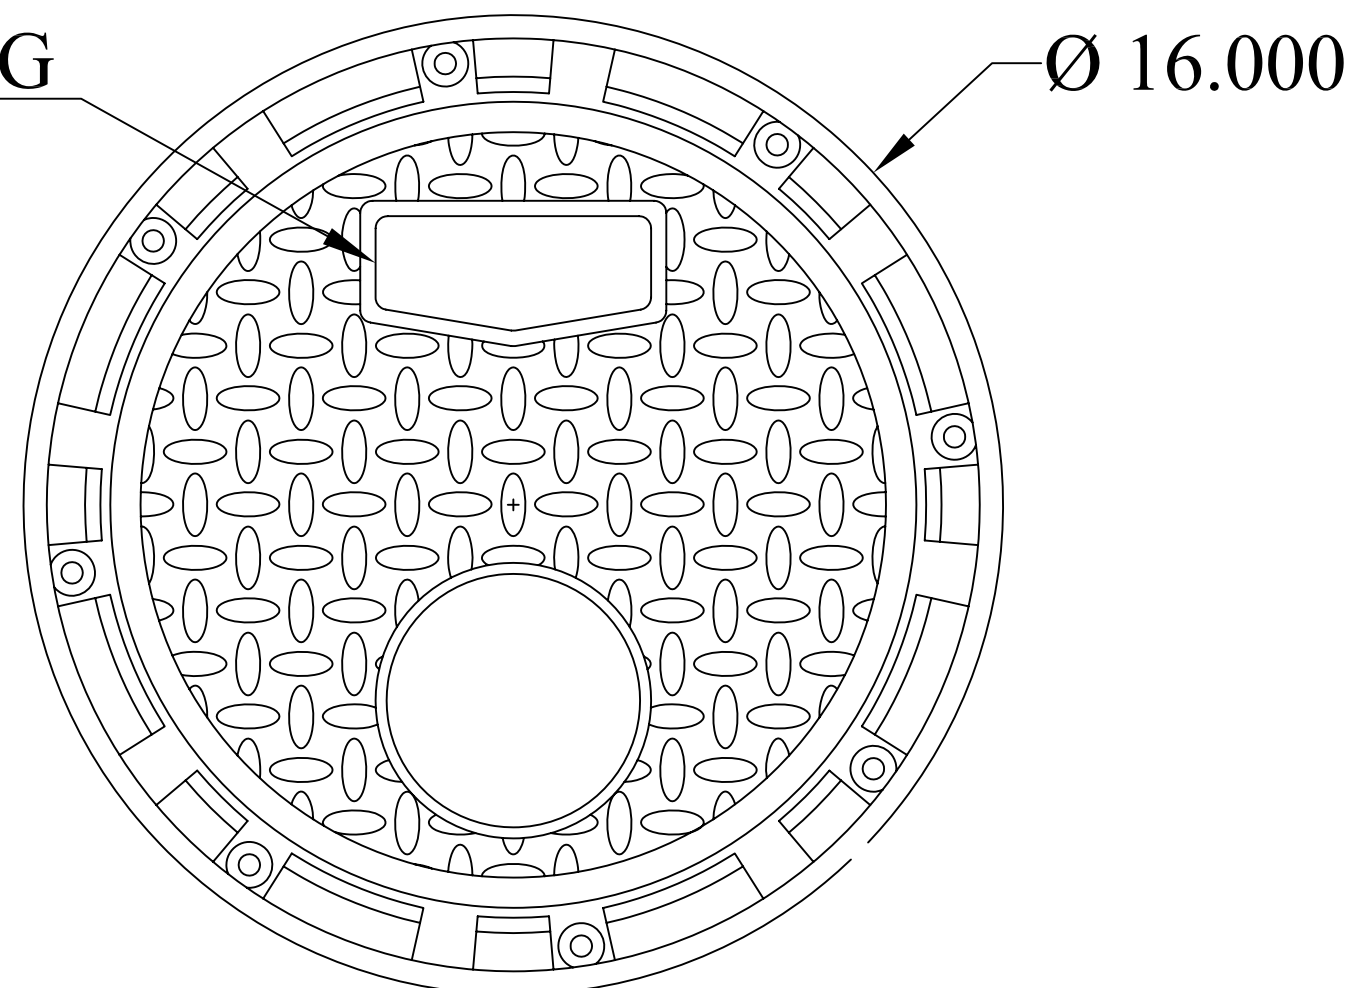

Ø 16.000

CUSTOM BUNA-N DOVE TAIL O-RING

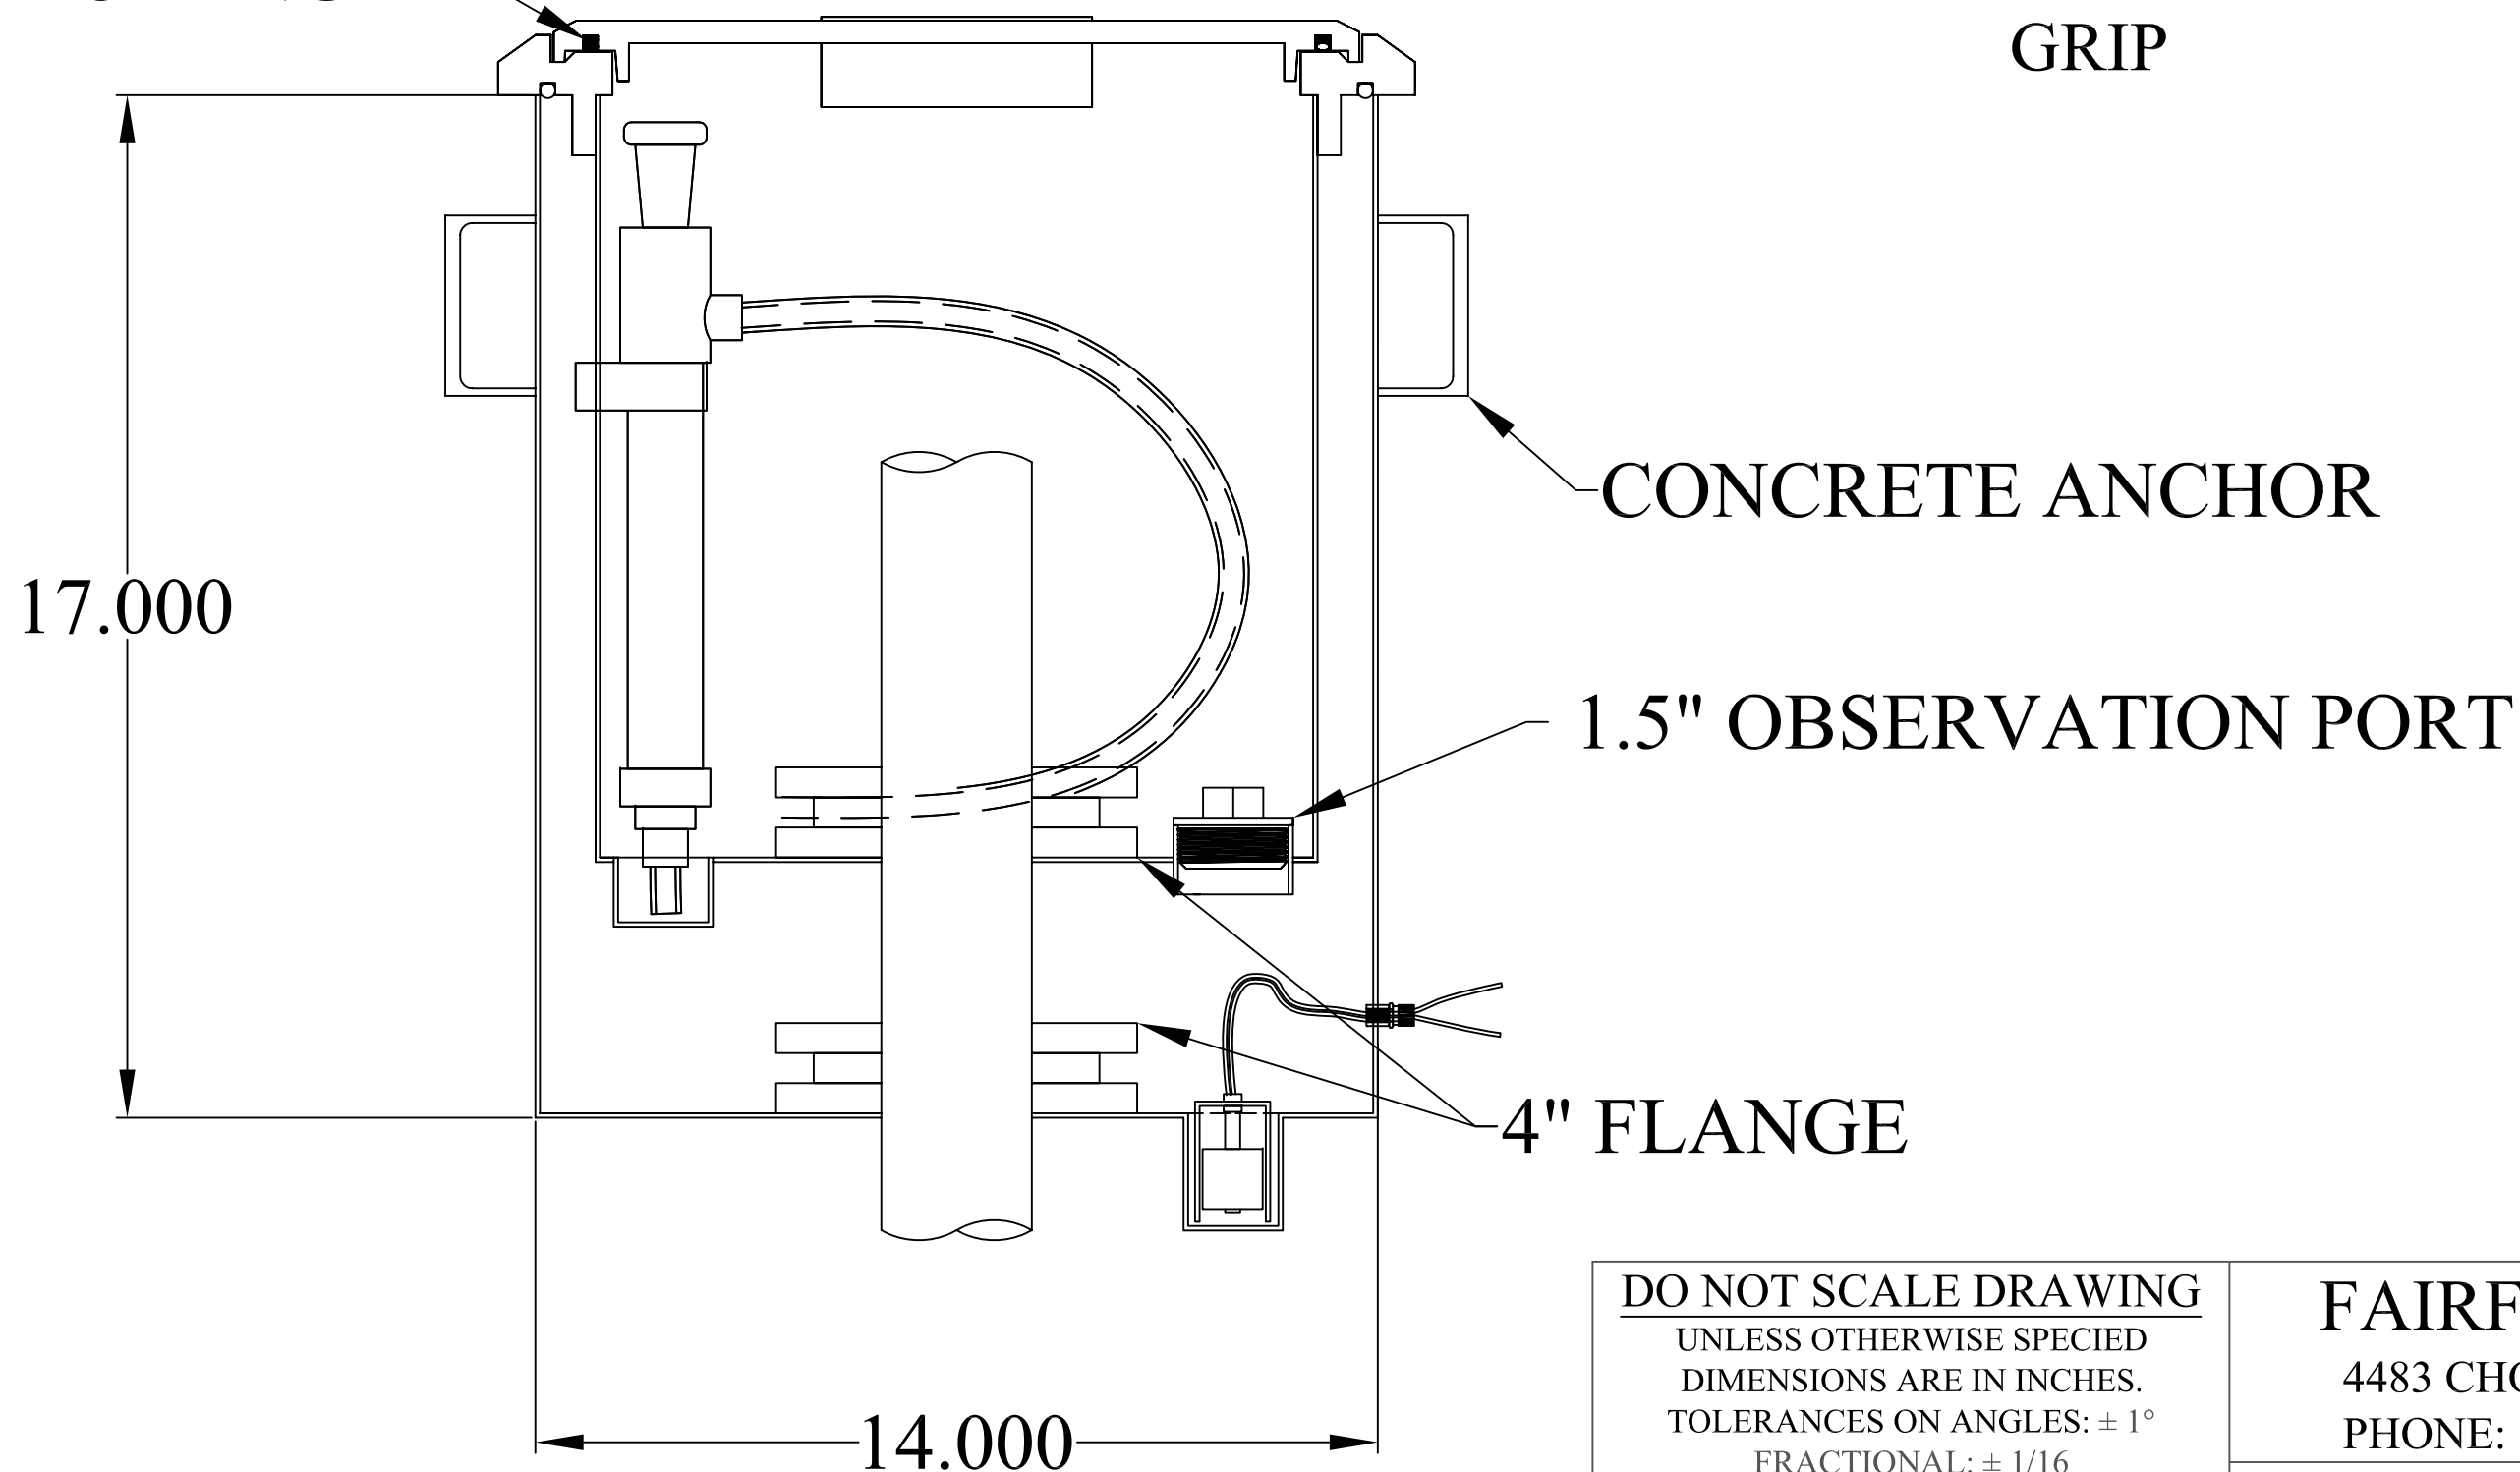

17.000

14.000

CONCRETE ANCHOR

1.5" OBSERVATION PORT

4" FLANGE

FEATURES:

- SPECIALLY DESIGNED WATER TIGHT FRAME & COVER ASSEMBLY CAST OF TOUGH DURABLE DUCTILE IRON. DETERS SURFACE WATERS WITH THE USE OF BUNA-N O-RINGS.
- 14 GA. STAINLESS STEEL 5 GALLON PRIMARY SPILL CONTAINER
- 14 GA. STAINLESS STEEL SECONDARY STEEL SPILL CONTAINER
- CHANNEL-STYLE CONCRETE ANCHORS
- 1.5" OBSERVATION PORT
- 4" FLANGE ASSEMBLY
- SINGLE STROKE PVC HAND PUMP
- SENSOR
- .25" NPT CONDUIT COUPLING AND CORD GRIP

DO NOT SCALE DRAWING
 UNLESS OTHERWISE SPECIED
 DIMENSIONS ARE IN INCHES.
 TOLERANCES ON ANGLES: ± 1°
 FRACTIONAL: ± 1/16
 2-PLACE DECIMALS: ± 0.062
 3-PLACE DECIMAL: ± 0.032

FAIRFIELD INDUSTRIES, INC
 4483 CHOPPEE ROAD, GEORGETOWN SC 29440
 PHONE: 843-461-3894 FAX: 843-461-3907

DESCRIPTION				SCM-5DQ	
SIZE	SCALE	DWG.NO.	REV.		
C	NTS	D062920-1	1		
DRAWN BY		DATE	SHT.		
D NETTLES		06/29/20	1 OF 1		

This document is proprietary and confidential. No part of this document may be disclosed in any manner to a third party without the prior written consent of Fairfield Industries

THIRD ANGLE PROJECTION

